


Diameter: 20.0 mm (0.78")
Height: 3.20 mm (0.125")


Specifications

Classifications:	Lithium
Chemical System	Manganese Dioxide Li/Organic Electrolyte
Designation:	ANSI CR2032, IEC 5004LC
Nominal Voltage:	3V
Storage Temp:	+5°C to +30°C
Operating Temp:	-20°C to +60°C
Typical Weight:	3.0 gm
Typical Volume:	0.63 cm ³ (0.04 in ³)
Typical Li Content:	0.07g
Transportation:	For complete details, please see the reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
Global (except US)	
United States:	49 CFR 173.185

Relative Capacity vs. Discharge

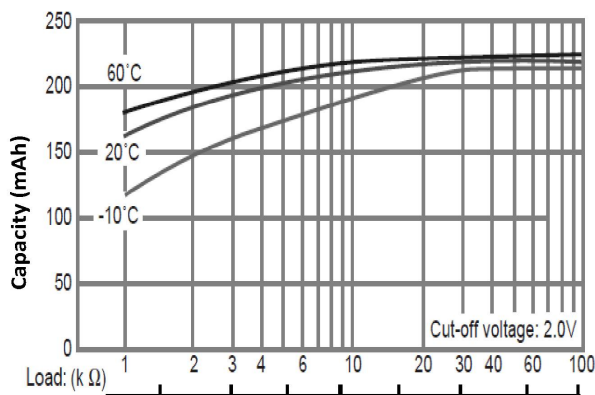

Constant Temperature Discharge @ 15 kΩ

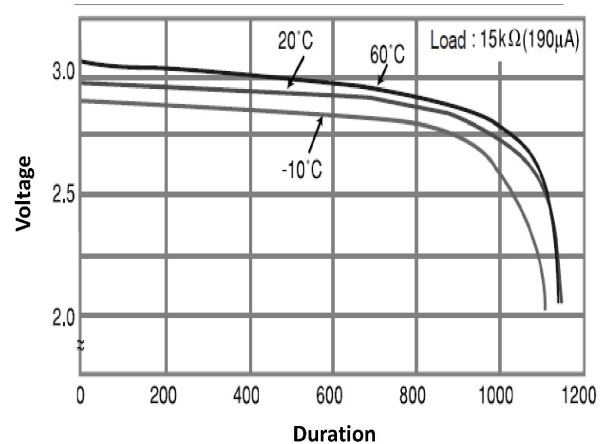

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20°C.
 ** When using these batteries at temperatures outside the range of -20 to +60°C, please consult Duracell in advance for conditions of use.
 *** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.