


Receptacle  
**KS-100 47 G12**  
Item KS-10047G12



**ingun**<sup>®</sup>  
Partner for Future Technology

**INGUN SELECTION**

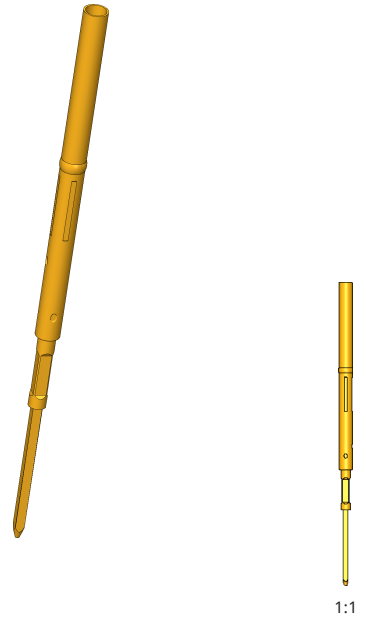

1:1

# Receptacle

## KS-100 47 G12

Item KS-10047G12



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group	Receptacles (KS)
Series	KS-100
Sub-series	KS-100 press-in version
Type of receptacle connection	Wire-wrap
Press ring	Yes
Surface area	Gold
Collar diameter	1.85 mm [.072 in]
Collar height	12 mm [.472 in]
Wire-wrap post length	10 mm [.393 in]
Knurl	No
Vacuum-tight	yes (< 1 ccm / min)
RoHS-compliant	Yes

### INGUN SELECTION

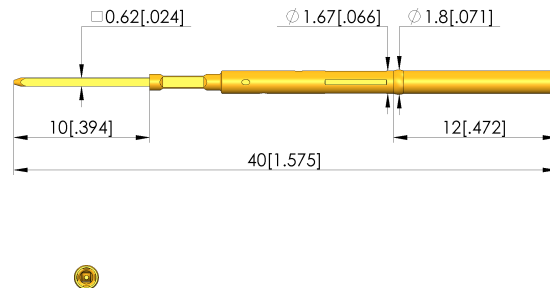

### Mounting hole

Mounting hole in CEM1	1.68 - 1.69 mm [.066 - .066 in]
Mounting hole in FR4	1.69 - 1.70 mm [.066 - .066 in]
Mounting hole with press ring in CEM1	1.70 - 1.75 mm [.066 - .068 in]
Mounting hole with press ring in FR4	1.70 - 1.75 mm [.066 - .068 in]

### Mechanical data

Total length	40 mm [1.57 in]
Outer diameter	1.67 mm [.065 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/22 EN

Weitere Informationen zum Thema  
Test probes



RECEPTACLES