



Taśma GERLED® Professional IP65 SMD 5050 12V

GERLED® Professional LED strip
IP65 SMD 5050 12V

GERLED® Professional striscia LED
IP65 SMD 5050 12V

GERLED® Professional LED-Streifen
IP65 SMD 5050 12V



Podwójna warstwa PCB

Double PCB laminate
PCB a doppio laminate
Doppelte PCB-Schicht



Stopień ochrony IP65

Protection class
Grado di protezione (IP)
IP-Klassee



3 lata

3 lata gwarancji

3 years warranty
3 anni di garanzia
3 Jahre Garantie



CRI >85

Współczynnik oddawania barw
Color rendering index
Indice di resa cromatica (Ra)
Farbwiedergabeindex



Zgodność z CE


CE Compliance
Conformità CE
CE-Zertifikat



min.
50 000 h

Żywotność

Life span
Vitalità
Lebensdauer



180°

Kąt świecenia

Viewing angle
Anglo luminoso
Beleuchtungswinkel



-25°C+60°C

Temperatura pracy

Operational temperature
Temperatura d'esercizio
Arbeitstemperatur



-40°C+80°C

Temperatura magazynowania

Storage temperature
Temperatura di stoccaggio
Lagertemperatur



Zgodność z RoHS


RoHS Compliance
Conformità RoHS
RoHS-Zertifikat

KOD PRODUKTU PRODUCT CODE CODICE PRODOTTO PRODUKTCODE	BARWA LIGHT COLOR COLORE FARBE	TEMPERATURA BARWOWA COLOR TEMPERATURE TEMPERATURA DI COLORE FARBTEMPERATUR	ILOŚĆ DIOD LED QUANTITY NUMERO DIODI ANZAHL DER LEDS	POBÓR MOCY POWER CONSUMPTION POTENZA NENNLEISTUNG	STRUMIEŃ ŚWIETLNY LUMINOUS FLUX FASCIO LUMINOSO LICHSTROM
05TS12GZ01550RGBXX	RGB	R:633 G:517 B:450	30 LED/m	7,2 W/m	310-315 lm/m
05TS12GZ03050RGBXX			60 LED/m	14,4 W/m	

30 LED/m



sekcja cięcia co 100 mm (3 diody)
cutsection every 100 mm (3 diodes)
sezione di taglio ogni 100 mm (3 diodi)
Schnittabschnitt alle 100 mm (3 LEDs)

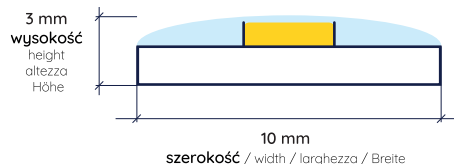


szerokość / width / larghezza / Breite

60 LED/m



sekcja cięcia co 50 mm (3 diody)
cutsection every 50 mm (3 diodes)
sezione di taglio ogni 50 mm (3 diodi)
Schnittabschnitt alle 50 mm (3 LEDs)

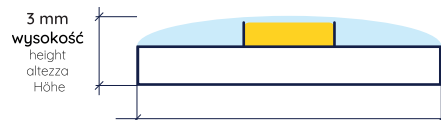

szerokość / width / larghezza / Breite