

### Features:

- Available in 2 thru 24 circuits
- Material: LCP UL 94-V0
- .0246" (0.625mm) square pin
- Tin-plated brass pin
- Standard color: Black

### Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max. (carry rated current load)

### Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.7	6	6.0	12.65
4	3.0	9.65	8	9.0	15.65

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
10	12.0	18.65	14	18.0	24.65
12	15.0	21.65	16	21.0	27.65

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
18	24.0	30.65	22	30.0	36.65
20	27.0	33.65	24	33.0	39.65

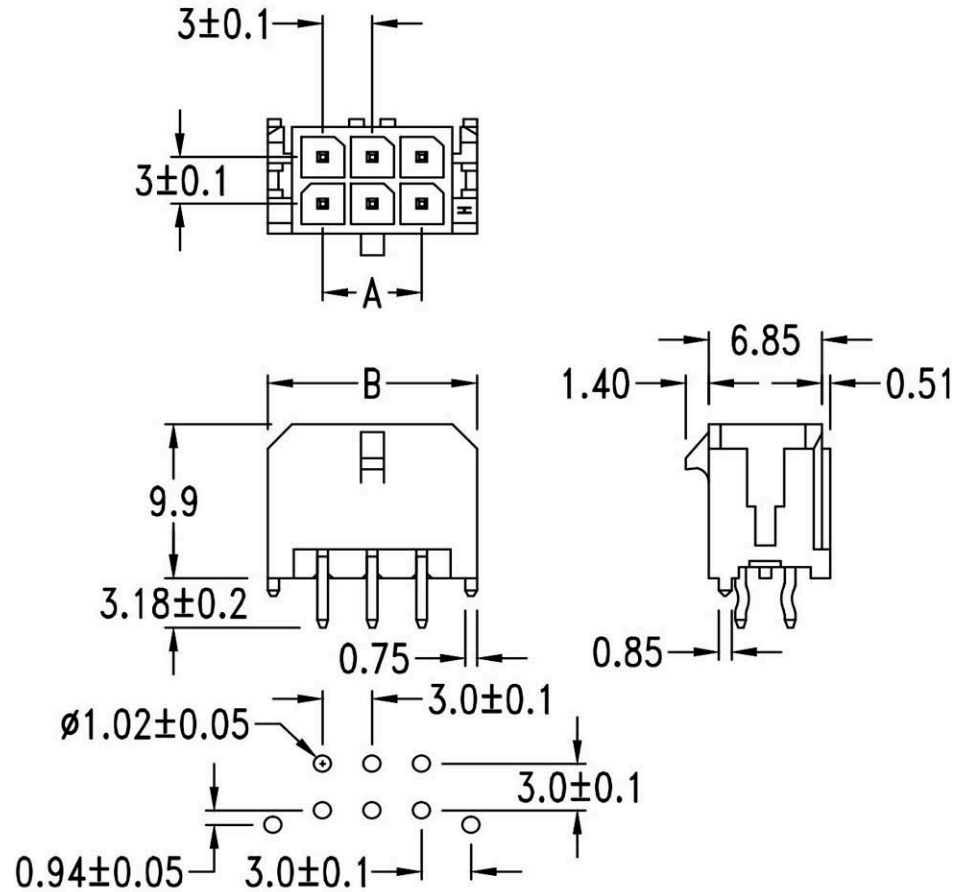

PCB Layout: Component side

Recommended PCB thickness: .062" (1.57mm)

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 MICRO-FIT 3.0 DOUBLE ROW WAFER 2X??P STRAIGHT TIN PLATING BLACK INSULATOR MATERIAL: LCP ROHS
DWG. 製圖 <i>Helen</i>	UNIT 單位 MM	SIZE 線規尺寸 A 4	PART NO. 料號 W4230-XXPDSTBON
DATE 制表日 2018/5/16	PAGE 張數 1 OF 1	REV. 版本 A	