

# LITHIUM IRON PHOSPHATE BATTERY

## SPECIFICATIONS

Model	: IFR32700(6.0)
Description	: Lithium Iron Phosphate rechargeable battery (RoHS compliant)
Dimension	: Max. 32.4(Ø) x 71(H) mm
Nominal Capacity	: 6Ah (Min. 5.7Ah) at 1200mA rate discharge to 2.0V at 25°C 3 cycles allowed for incoming inspection Discharge capacity varies with discharge current and temperature
Nominal Voltage	: 3.2Volt (after charge)
Cut-Off Voltage	: 2.0Volt
Approximate Weight	: 142g (bare cell)
Internal Impedance	: <25mΩ (with 1KHz AC testing at full charge)
Cycle Life	: 2,000 standard charge/discharge cycles > 70% (4.2Ah) capacity
Charging	: Using dedicated CC/CV (3.65±0.03V) battery charger only Charging with CC (Constant Current) to 3.65V, then charge with CV (Constant Voltage) till charge current <300mA Standard Charge Current 1200mA at 25°C below 8 hours Max. Charge Current 3A at 25°C below 3 hours
Discharging	: Standard Discharge Current 1200mA at 25°C Max. Discharge Current 18A at 25°C (Conditions apply)
Temperature Range	: Charge 0°C to 45°C Discharge -10°C to 60°C Storage 10°C to 25°C (Recommended) -10°C to 45°C (within 1 month) -10°C to 35°C (within 3 months)
Warranty	: Limited warranty is provide against defects of poor workmanship for 12 months from date of shipment. Problem caused by misuse, mishandling, malfunction of equipment, or mix-use of cell is not under this warranty. Replacement of cell is limited to 1-to-1 only
Storage Characteristic	: Long term storage may cause loss of capacity. Capacity recoverable related to time of storage. Cell is recommended to store with 45% capacity charged, temperature 20±5°C, and relative humidity 45%-75%. After max. 12 months storage, capacity recovery will be > 70% initial capacity (~4.2Ah), after 5 recovery charge/discharge cycles.
Appearance	: No scratch, rust, discoloration, leakage which may adversely affect commercial value of the cell
Standard Test Condition	: Unless otherwise specified, all test are conducted at temperature 20±5°C and relative humidity 60±15% The ammeter and voltmeter with accuracy grade 0.5 or higher The slide caliper with scale 0.01mm The impedance meter with AC 1kHz measurement

*Information is for reference only and is not construed as warranties either expressed or implied, of future performance. Performance varies with time, usage and storage condition.. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.*

**Model : IFR32700(6.0)**  
**Version : 1.10**


**WELL LINK**  
**INDUSTRIAL LIMITED**

**J507LT3B**

# LITHIUM IRON PHOSPHATE BATTERY

## SPECIFICATIONS

Capacity Retention	:	Discharge measured after the cell is stored for 28 days after standard charge. Capacity retention $\geq 85\%$ initial capacity ( $\sim 5.1\text{Ah}$ )
Maintenance Charging	:	Maintenance charging is required for storage over 3 months or when battery open circuit voltage below 3.3V. Prolonged storage without maintenance may result is battery gassing and loss of performance.
Remarks :	:	Charging voltage shall be less than 3.65V/cell. It must never exceed 3.68V/cell.
Ex-Factory Condition	:	As per air shipment regulations, the battery must be shipped at a State of Charge (SoC) $\leq 30\%$ . We recommend customer to arrange supplementary charging of the battery after receiving the batteries.
External Short Circuit Test	:	No fire, no explosion for short-circuiting of the positive and negative terminals of a fully charged cell with a total external resistance of $80\text{m}\Omega \pm 20\text{m}\Omega$ at $20 \pm 5^\circ\text{C}$ .
Free Fall Test	:	No fire, no explosion for dropping a fully charged cell 3 times from a height of 1m at random orientations onto a concrete floor at $20 \pm 5^\circ\text{C}$ .
Thermal Abuse Test	:	No fire, no explosion for placing a fully charged cell in an oven with temperature raised at a rate of $5^\circ\text{C}/\text{min} \pm 2^\circ\text{C}/\text{min}$ to a temperature of $130^\circ\text{C} \pm 2^\circ\text{C}$ .
Crush Test	:	No fire, no explosion for crushing a fully charged cell between two flat surfaces with a force of $13\text{kN} \pm 1\text{kN}$ at $20 \pm 5^\circ\text{C}$ until maximum force has been applied, or an abrupt voltage drop of 1/3 of the original voltage has been obtained, or 10% of deformation has occurred.
Over-charging Test	:	No fire, no explosion for charging a fully discharged cell at a constant current of 12A with a voltage limit of 4.8V for 8 hours.
Forced Discharge Test	:	No fire, no explosion for reverse charging a fully discharged cell at a constant current of 6A for 90 min. at $20 \pm 5^\circ\text{C}$ .

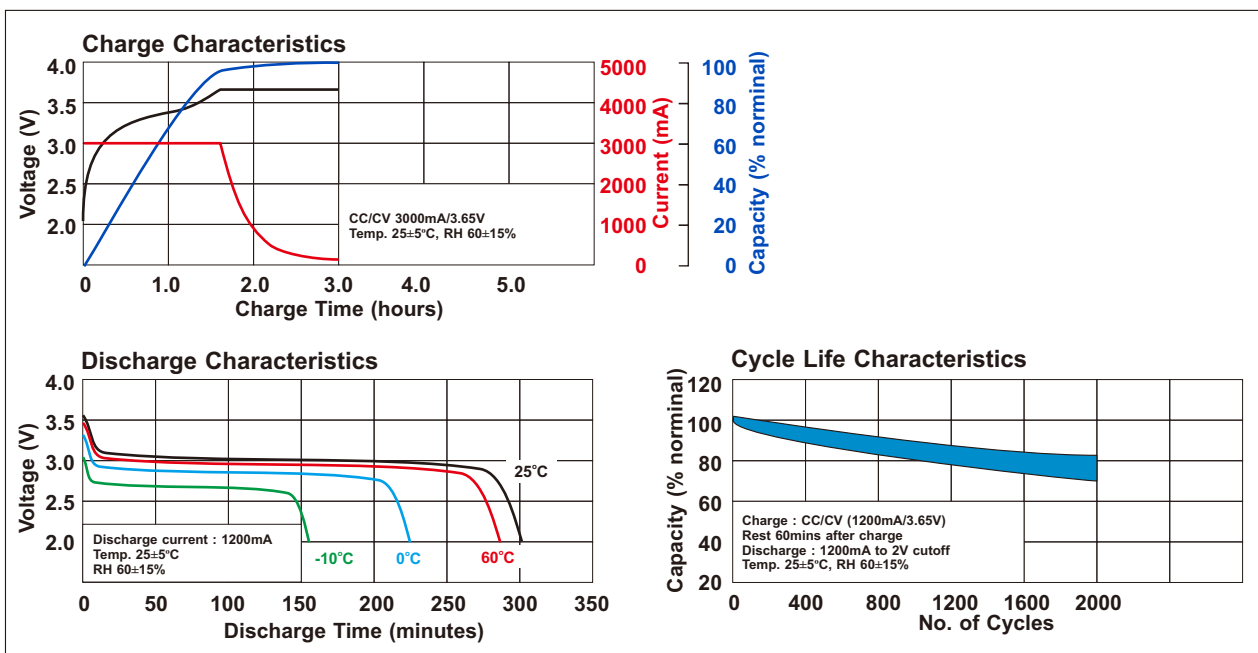

Information is for reference only and is not construed as warranties either expressed or implied, of future performance. Performance varies with time, usage and storage condition.. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.

Model : IFR32700(6.0)  
Version : 1.10

**WELL LINK**  
INDUSTRIAL LIMITED

**J507LT3B**

# LITHIUM IRON PHOSPHATE BATTERY

## SPECIFICATIONS

Customer of lithium iron phosphate battery should employ appropriate cautions in order to obtain optimum performance and safety.

- Charging** : Charging current, voltage, time and temperature should be within the limit specified in the specification.  
Reverse charging should be strictly prohibited.  
Improper charging may generate heat, smoke, rupture or flame, and may cause leakage or damage to the cell and personal injury.
- Discharging** : Discharging current, voltage and temperature should be within the limit specified in the specification.  
Short circuit and over discharging should be strictly prohibited.  
Over discharge may occur by self-discharge if the cell is left idle for a long time, or by leakage current of equipment.  
Improper discharging may generate heat, smoke, rupture or flame, and may cause leakage or damage to the cell and personal injury.
- Storage** : Storage voltage, time, temperature and relative humidity should be within the limit specified in the specification. Storage is recommended in low temperature, low humidity, no corrosive gas atmosphere.  
Long term storage may cause permanent loss of capacity.
- Cycle Life** : Cycle life performance differs by conditions of charging, discharging, temperature and/or storage condition.
- Shipping** : The cell should be checked after long term storage prior to shipment.  
Packaging should be according to latest requirement of IATA and IMDG.
- Product Design** : Do not solder directly on bare cell.  
Cell should be positioned far from heat source and heat components.  
Shock absorber should be equipped to minimize shock on the cell.  
Protection circuit should be equipped to insure safety in case of misuse and abnormal conditions.  
Battery should be designed to connect only to specified charger and system.  
Product design should be able to avoid short circuit, reverse connection, vibration, shock and crush of battery.  
Improper product design may cause damage and personal injury.
- Product Assembly** : Battery cell should be inspected visually before product assembly to avoid usage of damaged cell (for example, sleeve damage, battery distortion, or leaking).  
Excessive force on the battery terminals and battery surface should be avoided. Precaution should be taken to avoid short circuit of cell.  
Precaution should be taken when cell is moved / transported to other place.  
Battery pack should be assembled by cells from same batch, with similar capacity, voltage, internal resistance and charge level.
- Warning** : The cell may present risk of fire and chemical burn if mistreated.  
Do not disassembly cell, immersion in water and dispose in fire.  
Do not use cell with unusual conditions such as odors or leakage or heat.  
Cell should be disposed in discharged state.  
Improper handling may cause damage and personal injury.  
Keep the cell away from children.

*Information is for reference only and is not construed as warranties either expressed or implied, of future performance. Performance varies with time, usage and storage condition.. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.*




**Model : IFR32700(6.0)**  
**Version : 1.10**

**WELL LINK**  
**INDUSTRIAL LIMITED**

**J507LT3B**

# LITHIUM IRON PHOSPHATE BATTERY

## PRODUCT DRAWING

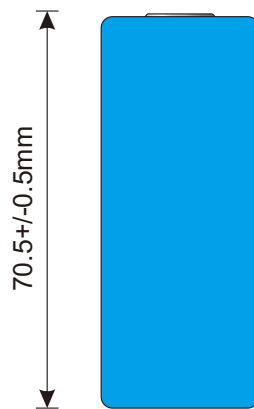

Dimensions with PVC Jacket

**Ink Jet**

**KINETIC (Lot. YYMM)  
+ IFR32700(6.0) LiFePO<sub>4</sub>  
3.2V 6Ah 19.2Wh**



*Information is for reference only and is not construed as warranties either expressed or implied, of future performance. Performance varies with time, usage and storage condition.. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.*

**Model : IFR32700(6.0)  
Version : 1.10**

**WELL LINK  
INDUSTRIAL LIMITED**

**J507LT3B**