

Motion detector - talis MWF3 200-9-1

Item No 18.06.0012.1 / EAN Code 4010940044053



PRODUCT DESCRIPTION

The talis MWF3 200-9-1 interior motion detectors have a switch for manual adjustment of the operating mode (ON, AUTO and OFF) and have a range of up to 9 m. The talis MWF3 200- 9-1 model can be connected in parallel and is ideally suited to reliably detect even over large distances.

- ▶ Ensuring the defined power-on time by one-time light balancing with detection

APPLICATIONS

- ▶ Stairwells
- ▶ Building entrances and corridors
- ▶ Reception areas and cellar rooms



TECHNICAL DATA

Electrical Data	
Supply voltage	AC 230 V ± 10% 50-60 Hz
Load incandescent bulb	2.000 W
Load halogen lamp	1.000 W (AC)
	1,000 VA / 600 W (LV conventional)
	1,000 VA / 900 W (LV electronic)
Load fluorescent lamps	900 VA (compensated)
	5 x 2 x 58 W
	7 x 2 x 36 W
	10 x 1 x 58 W
	12 x 2 x 18 W
	15 x 1 x 36 W
	25 x 1 x 18 W
Load energy-saving bulbs	400 W
	600 VA
	CFL und PLL
Load LED lamp	400 W
Power consumption	1 VA (in standby mode)
Parallel switching	Max. 6 sensors
Communication method	
Wired	3-wired
Operating specifications	
Operating mode	Learning function
	Test mode
Display and format	
Angle of detection	200°
Photosensitivity	10 Lux - infinite
Range	9 m (At an installation height of 1.5 m, at 20 - 25 °C)
Time setting	approx. 5 seconds - 30 minutes
Operating conditions	
Temperature (operation)	±0 °C ... +45 °C


General specifications

Scope of application	Inside
Dimension	80 x 80 x 33,5 mm (H x B x T)
Mounting	Flush mounting
Sensor	Passive infra-red (PIR)

Compliance with standards

Protection type	IP40
Protection class	II, according to corresponding mounting

DIMENSIONAL DRAWINGS

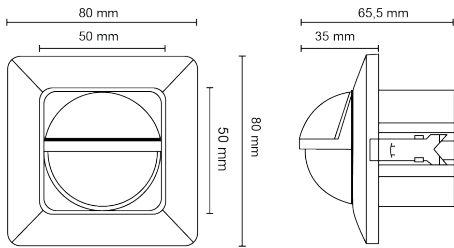

CIRCUIT DIAGRAMS

