

# **SPECIFICATIONS FOR LED DISPLAY**

**14.2mm(0.56") Seven Segments Four Digit**

**LFD056 -10 Series**

**WENRUN OPTOELECTRONIC**

**Features:**

- High efficiency, low power consumption.
- Extremely low current.
- Luminous evenly distributed on each segment.
- Low development cost.

**LFD056A/B/C/D -10****Descriptions:**

- Industrial standard size.
- These display provide excellent reliability in bright ambient light.
- These devices are made with white segments and black surface.

**Applications:**

- Audio equipment or Instrument panels.
- General use for digital indicators.
- Multimedia product.

**Selection Guide:**

Part No.		Chip		Lens Color
Anode	Cathode	Material	Emitting Color	
LFD056B/DSR-10	LFD056A/CSR-10	GaAlAs	Super Red	White Diffused
LFD056B/DG-10	LFD056A/CG-10	GaP	Green	
LFD056B/DY-10	LFD056A/CY-10	GaAsP/GaP	Yellow	

**Absolute Maximum Rating ( Ta=25 )**


Parameter	Symbol	Super Red	Green	Yellow	Unit
Power Dissipation/Segment	$P_d$	50	60	60	mW
Peak Forward Current /Segment (Duty 1/10@ 1KHz)	$I_{FP}$	70	70	70	mA
Continuous Forward Current /Segment	$I_F$	20	20	20	mA
Recommend use current /Segment	$I_F$	5~10	5~10	5~10	mA
Reverse Voltage /Segment	$V_R$	5	5	5	V
Operating Temperature Range	$T_{opr}$	-25~ +75			
Storage Temperature Range	$T_{stg}$	-30 ~ +85			
Solder Temperature	$T_{sol}$	260 ± 5			

- Notes :** 1、 This is the limit current . It is not allowed to use when the product work continuously.  
 2、 It is recommended that the product is driven by TTL,CMOS.  
 3、 Soldering time 5 seconds.

**Electrical Optical Characteristics ( Ta=25 )**

Parameter	Symbol	Super Red		Green		Yellow		Unit	Test Condition
		Typ.	Max.	Typ.	Max.	Typ.	Max.		
Luminous Intensity /Segment	$I_v$	9.2	--	4.6	--	4.6	--	mcd	$I_F=10mA$
Forward Voltage /Segment	$V_F$	1.85	2.3	2.2	2.5	2.0	2.5	V	$I_F=20mA$
Reverse Current /Segment	$I_R$	--	50	--	50	--	50	uA	$V_R=5V$
Dominant Wavelength	$\lambda_d$	645	--	565	--	585	--	nm	$I_F=20mA$
Spectral Line Half Width		30	--	30	--	30	--	nm	$I_F=20mA$

**Package Dimensions:**

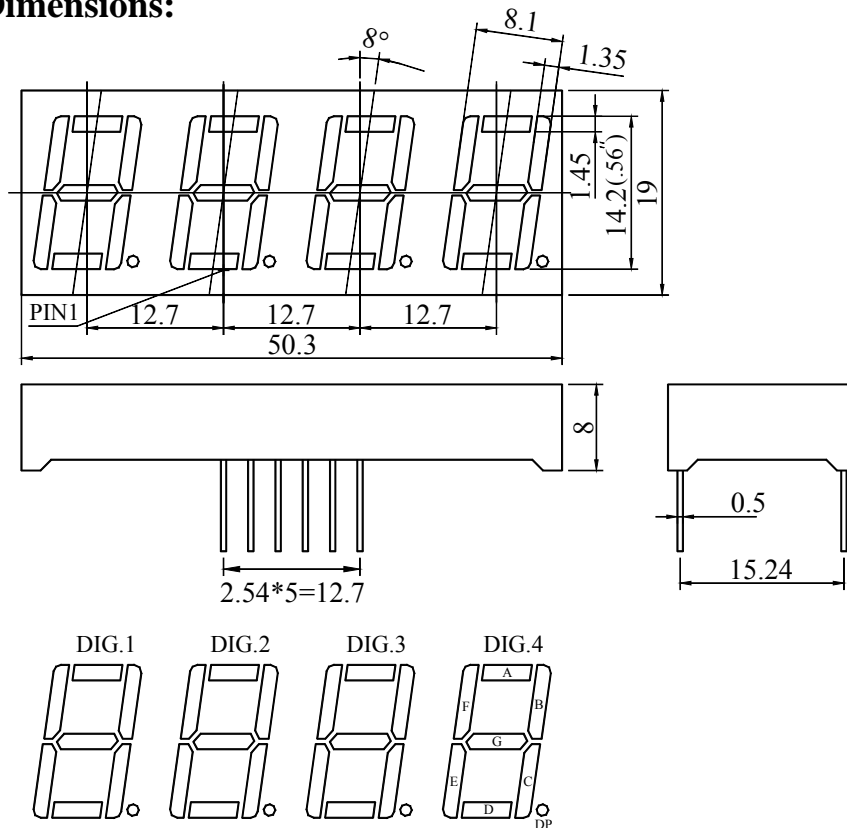


**NOTES :**


- All dimensions are in millimetres (mm)
- Tolerance is  $\pm 0.25$ mm unless otherwise noted

**Internal Circuit:**


Common Cathode

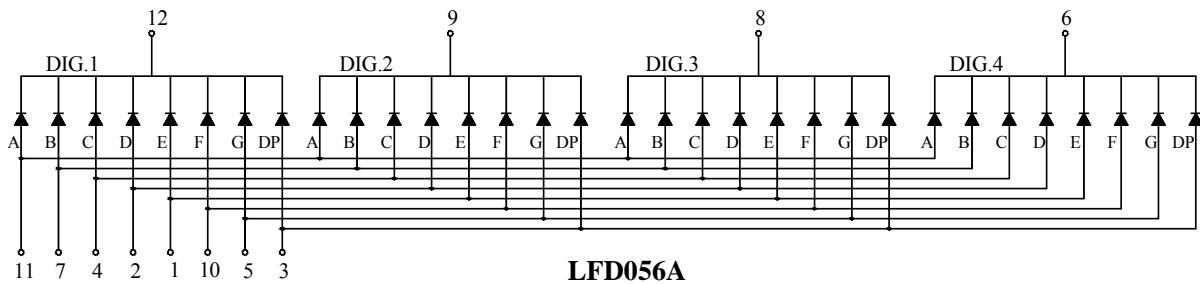

Common Anode

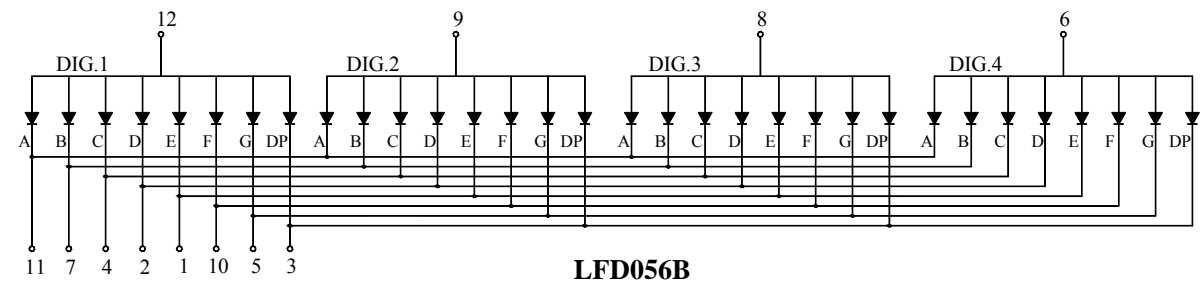

**Package Dimensions:**

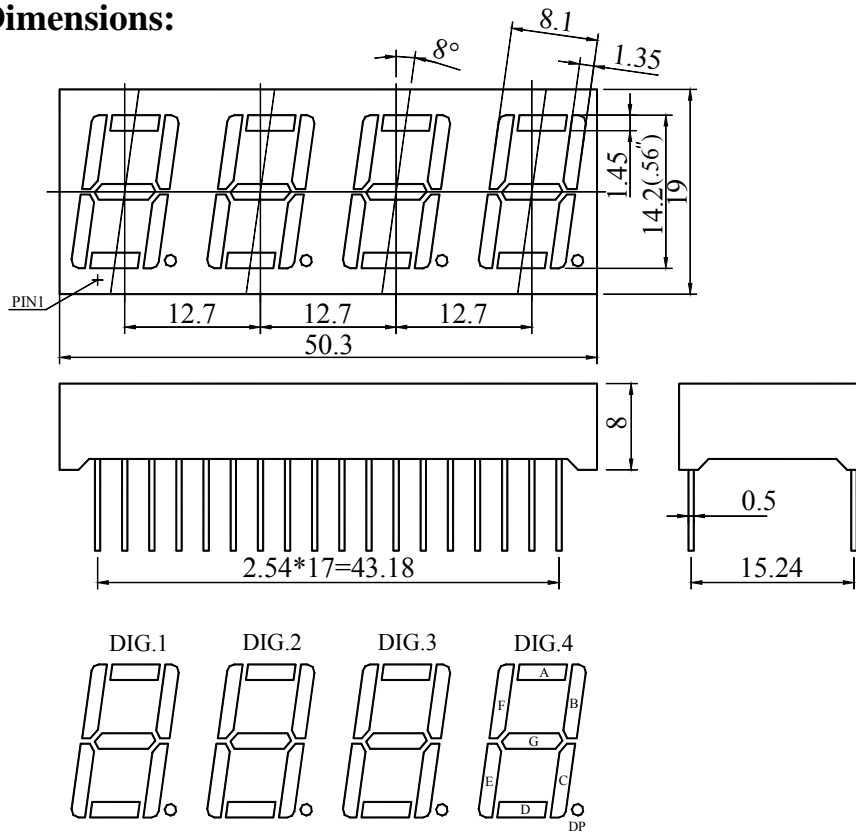


**NOTES :**

- All dimensions are in millimetres (mm)
- Tolerance is  $\pm 0.25\text{mm}$  unless otherwise noted


**Internal Circuit:**

Common Cathode

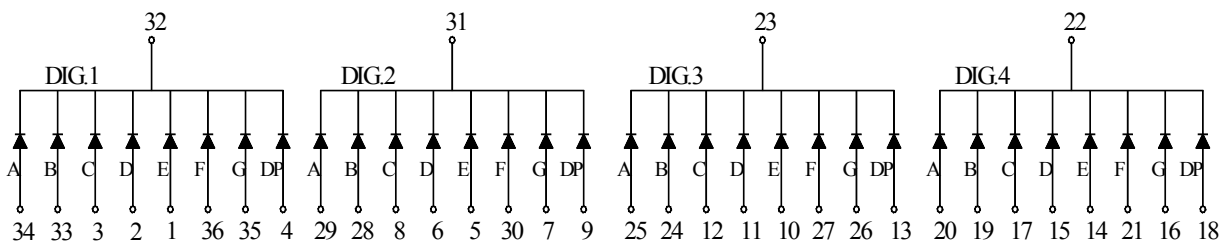

**LFD056C**

Common Anode

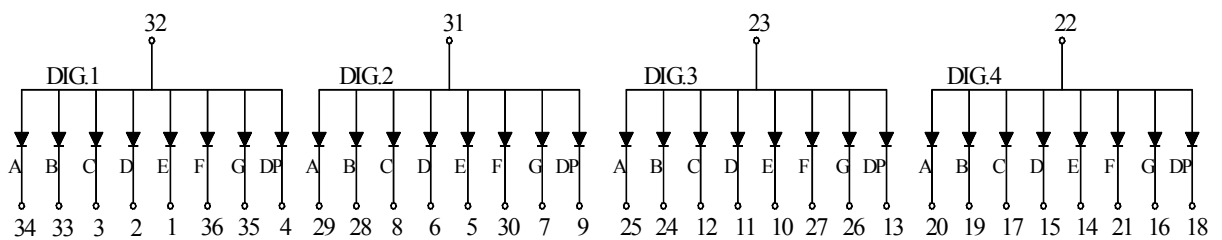

**LFD056D**

### Reliability Test Items and Conditions

NO	Test Item	Test Conditions	Duration	Sample	Ac/Re
1	Temperature Cycle	-30 ~ 25 ~ 85 ~ 25 30min 5min 30min 5min	50cycles	100	0/1
2	High Temp. Storage	Ta=85	1000hours	100	0/1
3	Temp.& Humidity Test	Ta=85 RH=85%	1000hours	100	0/1
4	Low Temp. Storage	Ta=-30	1000hours	100	0/1
5	Operating Life Test	Ta=25 ± 5 DC IF=15mA	1000hours	100	0/1
6	Solder Heat	Tsol=260 ± 5 , 10s	1times	20	0/1

### Typical Electro-Optical Characteristics Curves

