

10FF- 2Z- C3

RELAY SOCKET



CHARACTERISTICS


Ambient temperature :	-40 °C to 70°C
Rated voltage :	250VAC
Rated current :	10A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PA66+GF V0 (UL)
Contacts spring material :	QSn6.5-0.1
Retainer :	non-available
White plastic tag :	non-available
Modules :	non-available
Terminal torque :	0.6 Nm
Wire strip length :	7mm

Applicable relay type: HF10FF (2 poles)
HF10FH (2 poles)


DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm


Outline Dimensions

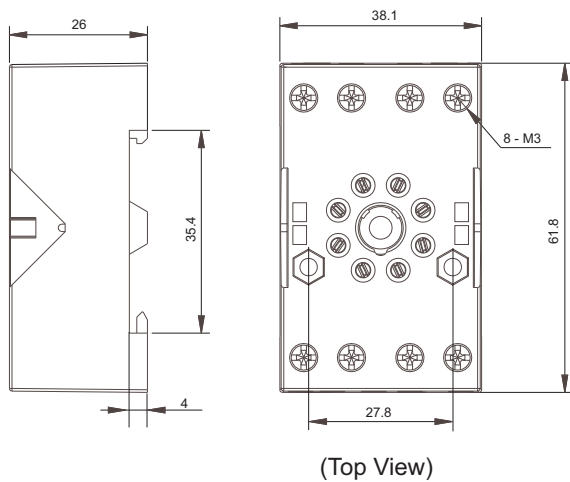

Wiring Diagram

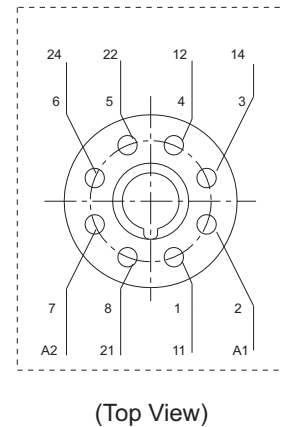

PCB Layout



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2008 Rev. 1.00