



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05'		

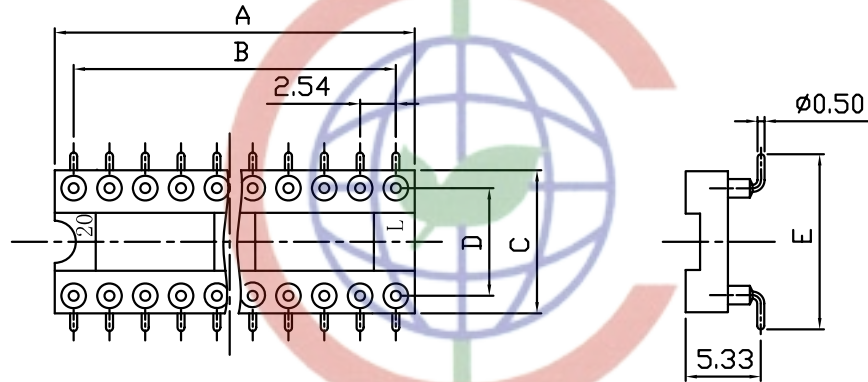

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1001-02
- PRODUCT NUMBER CODE:

DS1001-02 - X X X X

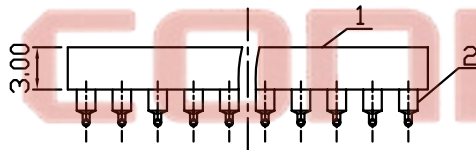

Position	Dimension				
	A±0.5	B±0.2	C	D±0.1	E±0.3
06	7.60	5.08	10.14	7.62	12.42
08	10.16	7.62	10.16	7.62	12.42
14	17.16	15.24	10.16	7.62	12.42
16	20.32	17.78	10.16	7.62	12.42
18	22.86	20.32	10.16	7.62	12.42
20	25.40	22.86	10.16	7.62	12.42
24	30.48	27.94	10.16	7.62	12.42
28	35.56	33.02	10.16	7.62	12.42
24	30.48	27.94	17.78	15.24	20.04
28	35.56	33.02	17.78	15.24	20.04
32	40.62	38.10	17.78	15.24	20.04
40	51.00	48.26	17.78	15.24	20.04

Clip plating  
 1: Tin 150u"  
 2: Tin 200u"  
 3: G/F  
 4: Gold 3u"  
 5: Gold 10u"  
 6: Gold 15u"  
 Pin plating  
 1: Tin 150u"  
 2: Tin 200u"  
 3: G/F  
 4: Gold 3u"  
 5: Gold 10u"  
 6: Gold 15u"

Width  
 N: 7.62mm  
 W: 15.24mm  
 No. of contacts  
 06 08 14 16 18 20 24  
 28 32 40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1001-02 SERIES

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	CUSTOMER
2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1 SHEET 1 OF 1
						C-DS1001-02-XXXXX



晨翔电子有限公司  
 CONNFLY CONNFLY ELECTRONIC CO. LTD