

CUSTOMER:

MODEL NUMBER:

OUR PART NO.:

CUSTOMER PART NO.:

CUSTOMER	APPROVED	CHECKED

Specification for Piezoelectric Ceramic Buzzer Pin Type	Des.	Page 2 of 6

1. Technical Parameter


Measuring condition

Part shall be measured under a condition (Temperature: 5~35°C, Humidity: 45%~85%R.H., Atmospheric pressure: 860 ~1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~1060hPa) is regulated to measure.

1	Resonant Frequency	4500±500Hz
2	Operating Voltage	1~25 Vp-p
3	Rated Current	Max.5mA , At 4.5KHz 50% duty Square Wave 12Vp-p
4	Sound Output at 10cm	Min. 80dB, At 4.5KHz 50% duty Square Wave 12Vp- p
5	Capacitance	10000±30% pF At 1KHz
6	Operating Temperature	-20°C~+70°C
7	Store Temperature	-30°C~+80°C
8	Net Weight	Approx 0.8g
9	RoHS	Yes

2. Dimensions

Unit: mm

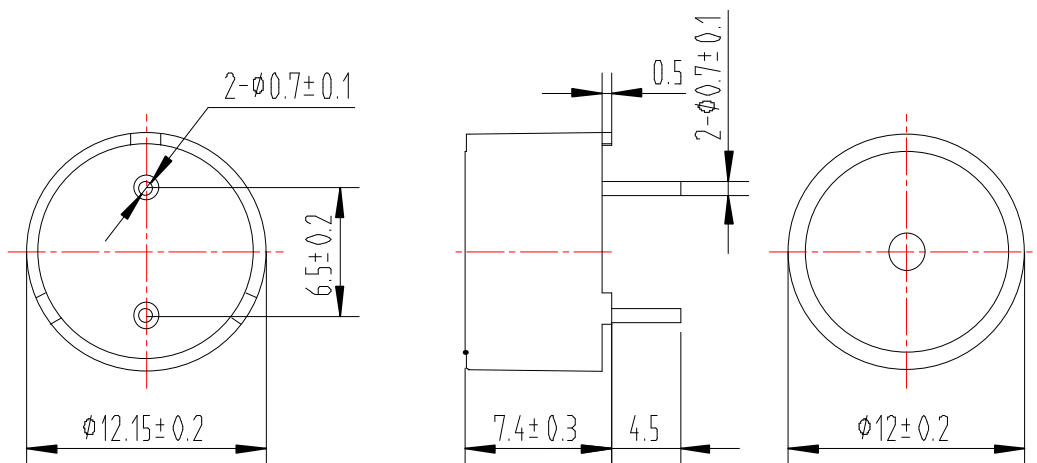


*Unit: mm; Tolerance: ± 0.5 mm Except Specified


*Housing Material: Black Noryl

		Des.	Page 3 of 6

3. Electrical And Acoustical Measuring Condition

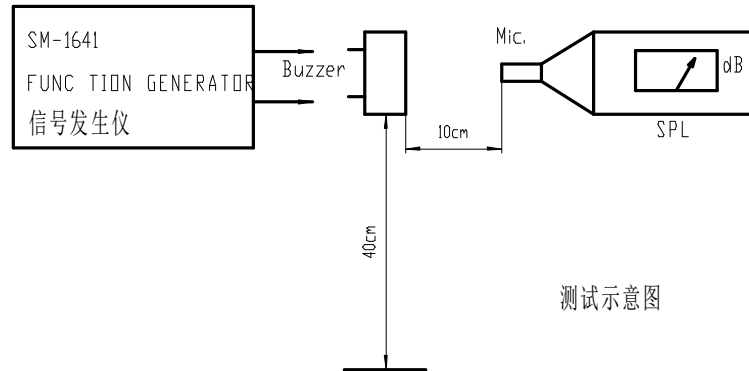

4. Frequency Response

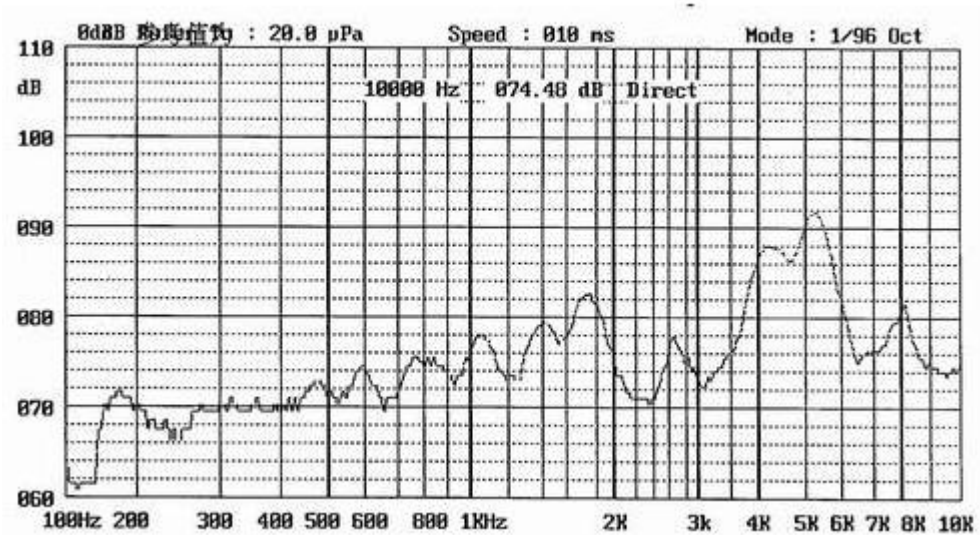

12Vp-p 50% duty Square wave, 10cm

Specification for Piezoelectric Ceramic Buzzer Pin Type	Des.	Page 4 of 6

5. Reliability Test

After any following tests the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall not deviate more than -5 dB from the initial value

5.1 Ordinary Temperature Life Test

The part shall be subjected to 96 hours at $25 \pm 10^{\circ}\text{C}$. Input rated voltage
Resonant frequency, 1/2 duty Square wave.

5.2 High Temperature Test

The part shall be capable of with standing a storage temperature of $+80^{\circ}\text{C}$ for 96 hours.

5.3 Low Temperature Test

The part shall be capable of with standing a storage temperature of -30°C for 96 hours.

5.4 Humidity Test

Temperature: $+40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ Relative Humidity: 90%~95% Duration: 48 hours
and expose to room temperature for 6 hours

5.5 Temperature Shock Test

Temperature: 60°C /1hour → 25°C /3hours → -20°C /1hour → 25°C /3hours (1cycle)
Total cycle: 10 cycles

5.6 Drop Test

Standard Packaging From 1.2m(Drop on hard wood or board of 5cm thick,
three sides, six plain.)

5.7 Vibration Test

Vibration: 1000cycles /min. Amplitude: 1.5mm, Duration: 1 hour in each 3 axes

Note:

As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enter it.

		Des.	Page 5 of 6

6.Packing

6.1 200PCS / 板 SIZE:18*18*1cm



6.2 2000PCS/ 盒 SIZE:19*19*17cm



6.3 8000PCS/ 箱 SIZE: 40.5*40.0*19 cm



		Des.	Page 6 of 6

7.其他信息

包装要求	1.珍珠泡棉板 200PCS/板 料号: F6-790 2.内盒 2000PCS/盒(10 板/盒) 料号: F6-057/F6-058 3.外箱 8000PCS/箱 外箱 40.5*40*19.5 4 堆装 料号: F6-022		
唛头要求			
验收要求			

8 变更记录

日期	变更项目	备注	确认人

--	--	--	--