






# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**DG30-A**

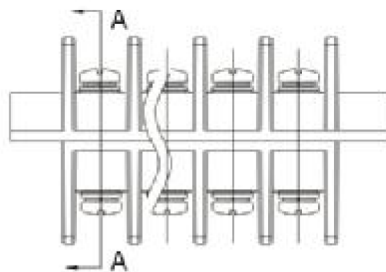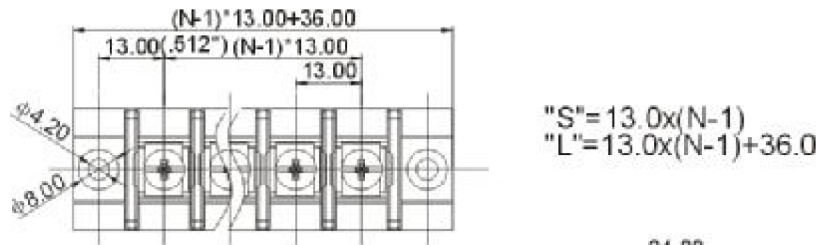


SECTION A-A

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	49.00	62.00	75.00	88.00	101.00	114.00	127.00	140.00	153.00					
S(mm)	13.00	26.00	39.00	52.00	65.00	78.00	91.00	104.00	117.00					

Approval	UL US	CE
<b>Electrical</b>		
<b>Standard</b>	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	450V
Rated current	30A	32A
Wire range	28-10AWG	4.0mm <sup>2</sup>
With standing voltage	AC3000V/1Min	
Insulation Resistance	1000M $\Omega$ /DC500V	
<b>Mechanical</b>		
Max. Torque Value	0.8N.m 7.0Lb.in	
Ambient temperature	-40 $^{\circ}$ C ~ +120 $^{\circ}$ C	
<b>Dimensions</b>		
Pitch	13.0mm (.512")	
Poles	2P-10P	
<b>Material</b>		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M3.5 Ni plated	

### HOW TO ORDER :

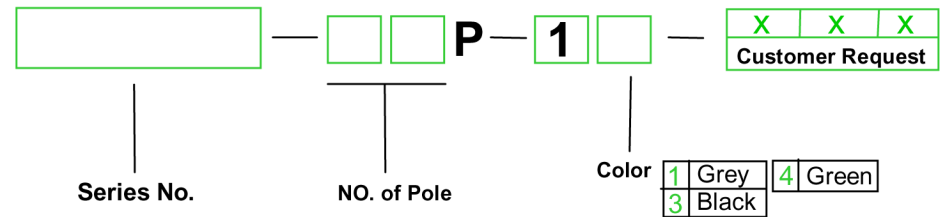

 mm (INCH)	<b>DEGSON ELECTRONICS CO., LTD.</b>
 THROUGHTLE PROJECTION	<b>NAME</b> <b>DG30-A</b>