




# DEGSON ELECTRONICS CO., LTD.

## Product Specification




**DG46S-B**

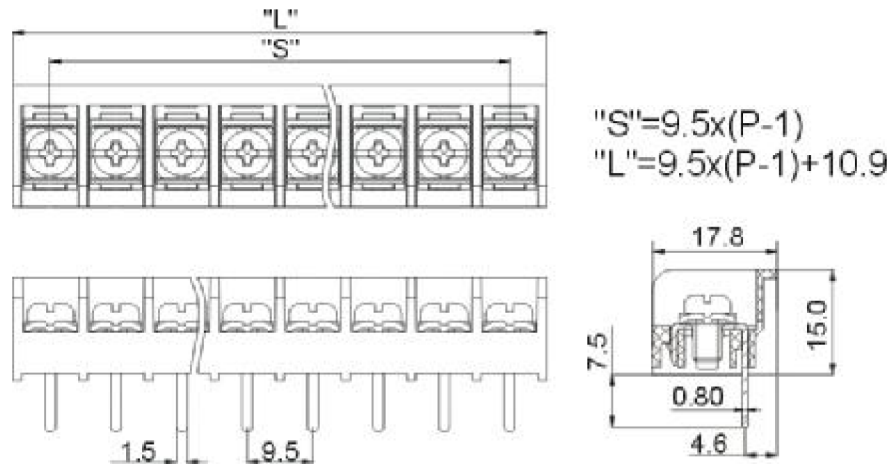

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.40	29.90	39.40	48.90	58.40	67.90	77.40	86.90	96.40	105.90	115.40	124.90	134.40	143.90
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.40	162.90	172.40	181.90	191.40	200.90	210.40	219.90	229.40	238.90	248.40			
S(mm)	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00	237.50			

Approval	UL	IEC
<b>Electrical</b>		
<b>Standard</b>	UL	IEC
Rated voltage	300V	450V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm <sup>2</sup>
With standing voltage		AC1600V/1Min
Insulation Resistance		500MΩ/DC500V
<b>Mechanical</b>		
Max. Torque Value		1.2N.m 10.6Lb.in
Ambient temperature		-40℃~+105℃
<b>Dimensions</b>		
Pitch		9.5mm(.375")
Poles		2P-24P
<b>Material</b>		
Housing		PA66,UL94V-0
Terminal		Brass,0.8t Tin plated
Screws		Steel,M4 Ni plated

### HOW TO ORDER :

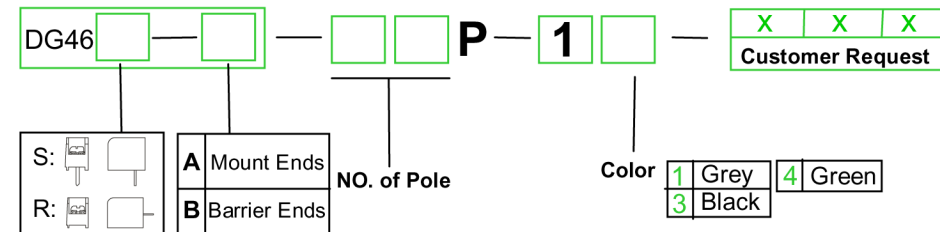

	<b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG46S-B</b>