


P.C.B LAYOUT

■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ WAFER

- Material: Base: Nylon 66 UL94V-2
pin: Brass Tin-plated

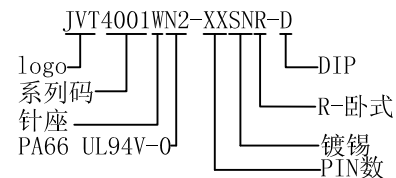

Poles	DIM.A	DIM.B
2P	3.96	7.92
3P	7.92	11.88
4P	11.88	15.84
5P	15.84	19.80
6P	19.80	23.76
7P	23.76	27.72
8P	27.72	31.68
9P	31.68	35.64
10P	35.64	39.60
11P	39.60	43.56
12P	43.56	47.52
13P	47.52	51.48
14P	51.48	55.44
15P	55.44	59.40
16P	59.40	63.36

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10



乔业电子有限公司

CHYAO YEE CONNECTORS CO., L TD

核准	审核	绘图	品名	MOLEX3.96mm 90° WAFER		
	陈宁亮	李勇军	料号	JVT4001WN2-XXSNR-D		
			图名	005	版本	A

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140408
----	------	----	----	----	----	-----	----	----------