






Material:

Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 A.
 Dielectric Withstanding Voltage: AC 1000V for 1minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100m A.
 Operating Temperature: -55°C ~ +105°C .

*** RoHS Compliant**

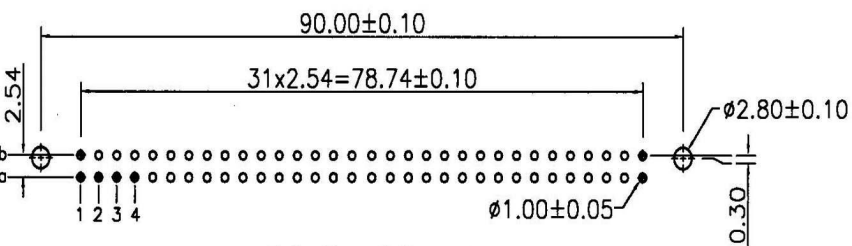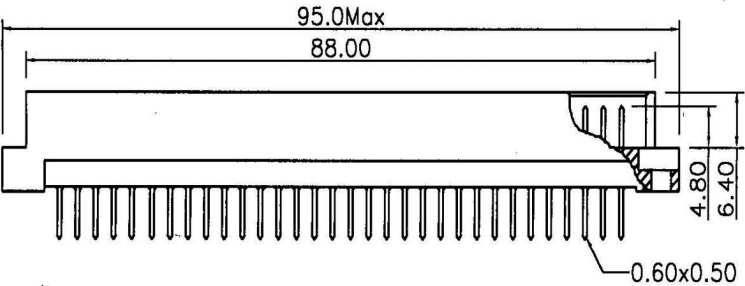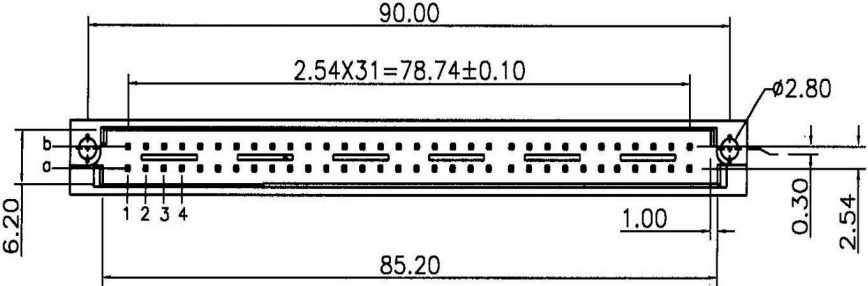

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange	X length			
				S	A	B	C
2.54mm	64	a b		4.0	2.5	13	17
	32	a -		P/N			
5.08mm	32	a b		C4162-64MCAXSOR			
	16	a -		C4162-32MAAXSOR			
				C4162-32MCAXSOR			
				C4162-16MAAXSOR			