


- NOTES:
- SPECIALITY:
 - Rated current:1.0A
 - Rated voltage:30V
 - Contact Resistance:50mΩ MAX
 - Insulation Resistance:1000MΩ MIN 500V DC
 - Dielectric withstanding voltage: 500V AC.
 - Solder ability:250±5℃, 5±0.5s.
 - Durability:1500 Cycles Min.
 - Operating condition:Temperature-40℃~+85℃; Humidity 80% R.H MAX
 - PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN

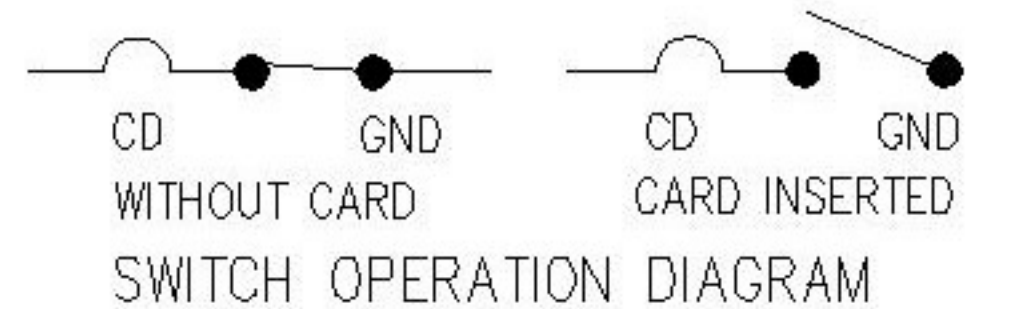

MicroSIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

NO	D	Dosage	Material	Color/plating
7	LINK	1PC	STEEL	PLATE WITH NICKEL
6	SPRING	1PC	SWP-B	PLATE WITH NICKEL
5	Slide	1PC	EMP THERMOPLASTIC	UL94V-0 BLACK
4	Shell	1PC	STEEL	SMT AREA:GOLD PLATED
3	CD Switch	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
2	Data Contact	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
1	Housing	1PC	HI-TEMP THERMOPLASTIC	UL94V-0 BLACK

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: STM CARD CONN
ΔX				ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:
ΔX				L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:
ΔX				4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	XKSIM-003-P7
				16 < L ≤ 63 ±0.4				WEIGHT 1.0g
				L > 63 ±0.5				SHEET 1/1
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO.,LIMITED			REVISION A0