

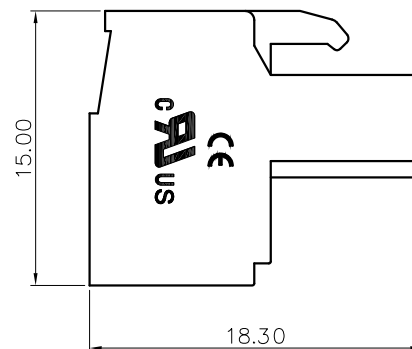
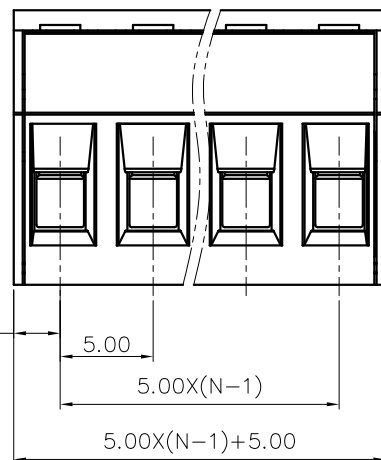


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

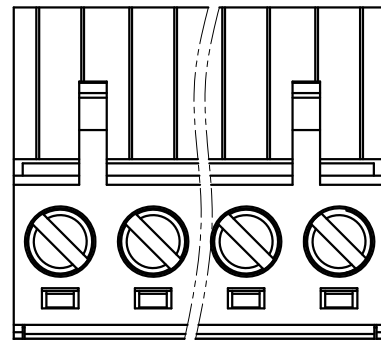

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2.5 , 3.54Lb.in
4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2. Torque value : M2.5 , 0.4N·m
3. Wire range : 2.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.00mm, Poles : N=02~22P
3. Stripping length : 7~8mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	
6	10	10	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2'

6. RoHS Compliance

2EGTKF - 5.0 - XXP - 1Y - 00A H (RoHS)  
 (Series No.) (Pitch) (Poles) (Single Pitch) 00A-(Standard)  
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)  
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.: Eric /08/06/18'		NINGBO GOLTEN ELECTRONICS CO., LTD.	
	APPD: /	NAME: 2EGTKF-5.0-XXP-1Y-00AH		
	CHKD: /	TITLE: CUSTOMER DRAWING		REV: /
	DRFT: /	DRAWING NO.: /		DO: /
<p>THIRD ANGLE PROJECTION</p>		<p>MM (INCH)</p> <p>DO NOT SCALE DRAWING</p>	SHEET: 1/1	SCALE: 1:1