
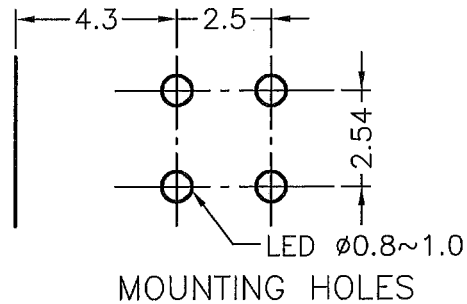
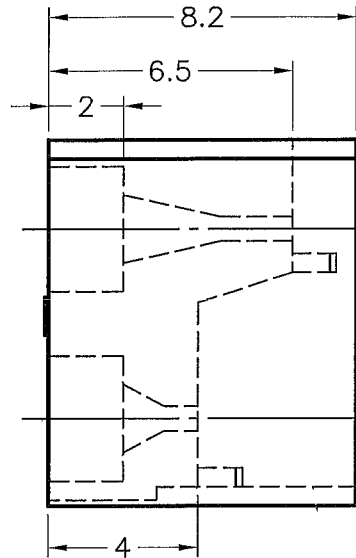


DIM	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

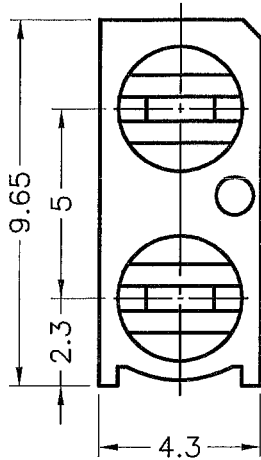

Component - Plastic

E41938

E I DUPONT DE NEMOURS & CO INC
 ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880
 101F(R9)(F1), 101F(R9)(F1), 101L(R9)(F1), E101F(R9)(F1), E101L(R9)(F1)
 Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Mln Thk (mm)	Flame Class	HAF	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0
 Dielectric Strength (kV/mm): 13
 High-Voltage Arc Tracking Rate (HVTR): 0
 Dimensional Stability (%): -
 Inherent Pore Tracking (IPT): -
 Volume Resistivity (10⁵ ohm-cm): 14
 High Volt, Low Current Arc Resists (D485): 6

(F1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and immersion in accordance with UL 746C.
 NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Milion or "DEL" for Delrin or "GRA" for Graist or "RYN" for Rynite or "ETPV" for ETPV grades.
 (3) Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics for AUL colors down to 0.74mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrind exceeding 20% is limited to V-2 Flammability for WV, RD, EK.
 ANSII/UL 94 small-scale test data does not pertain to building materials, furnishings and related consumer products. ANSII/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1996-07-29
 Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.	TITLE		LED SPACER SUPPORT		SPEC. DWG.			
	MATERIAL		NYLON 66 UL94V-2		DATE		2002.11.18	
	FINISH				DRAWN		JASON	
	COLOR		BLACK		CHECK			
PART NUMBER		DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED		APPROVED		
LED-322		LED-322		TOLERANCE		SEE ABOVE		
SIZE	SCALE	UNIT	REV					
A4	5:1	mm	B					